




- GENERAL NOTES:
1. ALL DIMENSIONS ARE IN MM, UNLESS OTHERWISE MENTIONED.
  2. NO DIMENSIONS TO BE SCALED OR MEASURED FROM THIS DRG.
  3. CONTRACTOR MUST VERIFY ALL DIMENSION ON SITE & IF SOME DISCREPANCY FOUND SHALL BE BRING TO THE NOTICE.
  4. ALL BRICKWORK COVERING PIPES/ SERVICE DUCT WILL BE DONE AFTER INSTALLATION OF PIPES.
  5. CONTRACTOR MUST CHECK DIMENSIONS, LEVELS AND HEIGHTS W.R.T BENCHMARKING AT SITE AND INFORM IMMEDIATELY TO THE DESIGN TEAM IN CASE OF ANY DISCREPANCIES ARE NOTICED.
  6. ENSURE COMPLIANCE WITH ALL LOCAL BYE-LAWS, FIRE CODES AS WELL AS NBC.
  7. CONFLUENCE SHALL NOT BE RESPONSIBLE OR LIABLE FOR ANY DEVIATION IN ANY RESPECT INCLUDING CHANGE IN DESIGN, VISUAL INTENT, SPECIFICATION OR CONSTRUCTION METHODOLOGY ETC. MADE WITHOUT SPECIFIC WRITTEN APPROVAL FROM CONFLUENCE.
  8. ANY ERRORS, DISCREPANCIES, OMISSIONS, ALTERATIONS, MODIFICATIONS, CHANGES IN DESIGN SPECIFICATION DUE TO SITE CONDITIONS TO BE REPORTED TO THE ARCHITECT IMMEDIATELY FOR CLARIFICATIONS BEFORE EXECUTION OF WORK.
  9. NO ALTERATIONS TO DESIGN SPECIFICATIONS BE MADE WITHOUT PRIOR CONSENT OF THE ARCHITECT.
  10. ALL SAMPLES / MATERIALS TO BE APPROVED BY CONFLUENCE PRIOR EXECUTION OF INTERIORS WORKS AT SITE AND IN THIS REGARD A SAMPLE BOARD TO BE PREPARED BY CONTRACTOR AND HAS TO GET APPROVE FROM CONFLUENCE PRIOR TO EXECUTION.
  11. ALL RCC WORK AS/STR. DRG. ONLY.
  12. THE REINFORCEMENT SHALL BE PROVIDED IN ALL THE SERVICES SHAFTS (ELECTRICAL, LOW VOLTAGE, FIC ETC.) AND SHALL BE CAST AFTER INSTALLATION OF ALL THE REQUIRED SERVICES CONDUITS, SLEEVES, CABLES/ CABLE TRAYS/ CABLE LADDERS FOR FIRE COMPARTMENTATION REASON AS PER NBC 2016, PART 4 CLAUSE NUMBER 3.4.3.5 (FOR FIRE RATING OF WALL ENCLOSURE & FIRE RATING OF FIRE DOORS) & CLAUSE NO. C-13 'SERVICE DUCTS/SHAFTS'. ALL THE TOILET CUTOUTS FOR FLOOR TRAPS AND WC TRAPS SHALL BE CAST AFTER LAYING ALL THE REQUIRED PLUMBING PIPES. ALL THE INTERNAL PLUMBING SHAFT SHALL ALSO BE CAST AS PER AFORESAID CLAUSE BARRING THE PERIPHERAL PLUMBING SHAFT. THESE PERIPHERAL SHAFTS SHALL BE PROVIDED WITH CAT-WALK FOR MAINTENANCE REASONS.
  13. SILL AND LINTEL LEVELS TO BE MEASURED FROM RESPECTIVE FINISH FLOOR LEVELS.
  14. ALL RESPECTIVE LEVELS TO BE MEASURED CONSIDERING ±0.00 TO BE AT CENTER BULGE OF MAIN ROAD (LEVEL +200.40).

| REVISION | DATE | DESCRIPTION | BY |
|----------|------|-------------|----|
|----------|------|-------------|----|


THIS DRAWING IS A "COPYRIGHT" CONTENT OF THIS DRAWING OR PART THERE OF MAY NOT BE USED OR REPRODUCED WITHOUT THE PERMISSION OF THE ARCHITECT.

DRAWING FOR :-

- FOR SITE CO-ORDINATION ☐
- FOR TENDER PURPOSE ☐
- FOR APPROVAL ONLY ☐
- FOR ADVANCE COPY ☐
- GOOD FOR CONSTRUCTION ☒

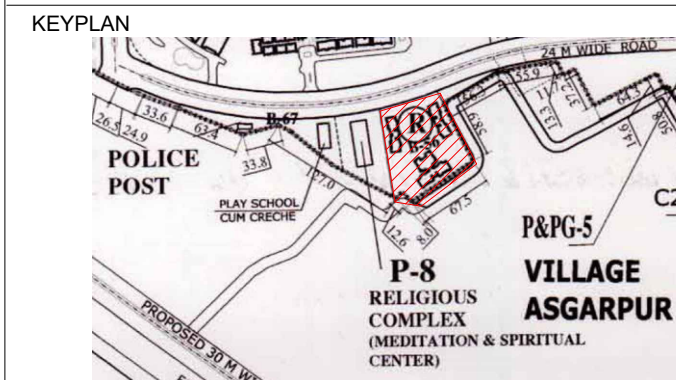

CLIENT  
JAYPEE INFRATECH LTD.

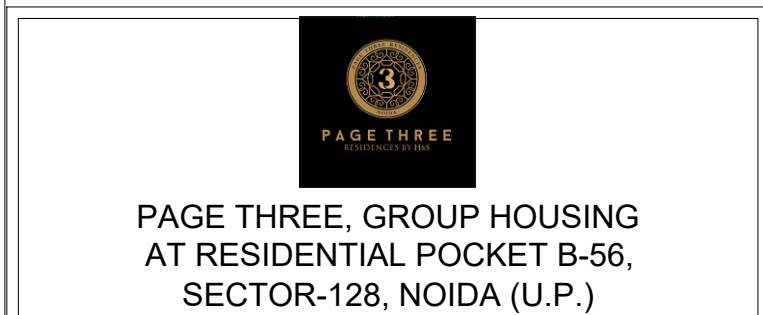

| DATE  | PROJECT INCHARGE | CHECKED BY    |
|-------|------------------|---------------|
|       | MUKESH KUMAR     | PALIN         |
| SCALE | DEALT BY         | APPROVED BY   |
| 1:150 | SUYASH POTDAR    | VISHAL SHARMA |

DRAWING TITLE

SITE PLAN

| CONSULTANTS              |                                    |
|--------------------------|------------------------------------|
| STRUCTURE                | :SWATI STRUCTURE SOLUTION PVT.LTD. |
| ELECTRICAL               | :CESPL                             |
| PLUMBING & FIRE FIGHTING | :CESPL                             |
| HVAC                     | :CESPL                             |
| LANDSCAPE                | :PROLIFIC DESIGNS                  |

ARCHITECT:



Confluence

ARCHITECTURE

B-421, NFC Ph. +91-11-26929684 ccs@inconfluence.com Member of IGBC N-D-85, INDIA Ph. +91-11-40564768 www.inconfluence.com ISO - 9001 - 2009 architecture urban design hospitality interiors

DRAWING NO.

REVISION