

**प्रारूप-घ (संलग्नक-3)**  
औपबन्धिक (प्रोविजनल) अनापत्ति प्रमाणपत्र

यूआईडी संख्या : **UPFS/2024/128242/GBN/GAUTAM BUDDH NAGAR/27972/JD**  
दिनांक : **14-08-2024**

प्रमाणित किया जाता है कि मैसर्स **EXOTICA INFRATECH LLP, ABLOON INFOTECH PVT LTD.** पता **PLOT NO. A- 3A, SECTOR 132, SECTOR 132, NOIDA** तहसील - **DADRI** प्लॉट एरिया **20242.60 sq.mt** (वर्गमीटर), कुल कवर्ड एरिया **133622.83** (वर्गमीटर), ब्लॉकों की संख्या **3** जिसमें

ब्लॉक/टावर	प्रत्येक ब्लॉक में तलों की संख्या	बसेमेंट की संख्या	ऊँचाई
TOWER 1	28	2	134.350 mt.
TOWER 2	28	2	134.350 mt.
IT FACILITY PLAZA	3	2	15.750 mt.

है। भवन का अधिभोग मैसर्स **EXOTICA INFRATECH LLP, ABLOON INFOTECH PVT LTD.** द्वारा किया जायेगा। इनके द्वारा भवन में अग्नि निवारण एवं अग्नि सुरक्षा व्यवस्थाओं का प्राविधान एन0बी0सी0 एवं तत्संबंधी भारतीय मानक ब्यूरो के आई0एस0 के अनुसार किया गया है। इस भवन को औपबन्धिक अनापत्ति प्रमाणपत्र, एन0बी0सी0 की अधिभोग श्रेणी **Business** के अन्तर्गत इस शर्त के साथ निर्गत किया जा रहा है कि प्रस्तावित भवन में अधिभोग श्रेणी के अनुसार सभी अग्निशमन व्यवस्थाओं के मानकों का अनुपालन पूर्ण रूप से किया जायेगा तथा भवन के निर्माण के पश्चात भवन के अधिभोग से पूर्व अग्नि सुरक्षा प्रमाण पत्र प्राप्त किया जायेगा। ऐसा न करने पर निर्गत प्रोविजनल अनापत्ति प्रमाणपत्र स्वतः ही निरस्त मान लिया जायेगा, जिसके लिए मैसर्स **EXOTICA INFRATECH LLP, ABLOON INFOTECH PVT LTD.** अधिभोगी पूर्ण रूप से जिम्मेदार होगा/होगें।

"यह प्रमाण-पत्र आपके द्वारा प्रस्तुत अभिलेखों, सूचनाओं के आधार पर निर्गत किया जा रहा है। इनके असत्य पाए जाने पर निर्गत प्रमाण-पत्र मान्य नहीं होगा।"

**Note :** अग्निशमन अधिकारी /मुख्य अग्निशमन अधिकारी द्वारा प्रेषित स्थलीय भौतिक निरीक्षण संस्तुति आख्या व अपलोडिड मानचित्रों के अनुसार सम्बन्धित सक्षम सत्ता प्राधिकारी को यह प्रोविजनल अनापत्ति प्रमाण पत्र इस शर्त के साथ निर्गत किया जाता है कि उपरोक्त भवन के अध्यासन/ प्रयोग से पूर्व समस्त अग्निशमन व्यवस्थाएं उ0प्र0 अग्निशमन तथा आपात सेवा अधिनियम-2022 तद्वधीन नियमावली-2024 NBC-2016 के अनुसार अधिष्ठापित कराया जाना अनिवार्य है, यदि भवन स्वामी द्वारा बिना व्यवस्थाओं के अध्यासन किया जाता है, तो भवन के असुरक्षित अध्यासन हेतु सत्ता प्राधिकारी निगरानी रखे।



हस्ताक्षर (निर्गमन अधिकारी)

**संयुक्त निदेशक**

(डिजिटल रूप से हस्ताक्षरित)

Aman Sharma

A0269865B740788D0DE1F7D7C6707A357F263D40

25-08-2024

निर्गत किये जाने का दिनांक : **25-08-2024**  
स्थान : **LUCKNOW**

Note:- Kindly check the authentication of NOC by verifying the UID at departmental portal of UP Fire Service.



भारतीय प्रौद्योगिकी संस्थान रुड़की  
INDIAN INSTITUTE OF TECHNOLOGY ROORKEE

सिविल अभियांत्रिकी विभाग  
DEPARTMENT OF CIVIL ENGINEERING

रुड़की - 247 667, उत्तराखण्ड, भारत  
ROORKEE - 247 667, UTTARAKHAND, INDIA

Fax / फ़ैक्स : 01332-275568, 273560

Tele / टेली : 01332-284319, 285219

E-mail / ई-मेल : civil@iitr.ernet.in

To,  
M/s Exotica Infratech LLP  
(formerly known as Abloom Infotech Pvt. Ltd.)  
H-63, Sector-63, Noida U.P.

**Subject:** Vetting of Structure Design of 2 IT Towers, MLCP, Commercial plaza and 2nos. Basements of Proposed IT/ITES project located at plot. No. A-3A Sector 132, Noida, U.P.

Dear Sir,

This company M/s Exotica Infratech LLP (formerly known as Abloom Infotech Pvt. Ltd.) has provided the structure drawings & design of 2 nos. basements, MLCP, Commercial Plaza, and 2nos. Towers (Tower-1, Tower-2) of IT/ITES Project located at plot no. A-3A, Sector-132, Noida, U.P. and have been vetted for their compliance with relevant codes of practices. The Built-up area & height are given below.

The Built Up Area (BUA) of the project is 1,33,622.829 sqm. The breakup of B.U.A is as follows:

Basements = 31,811 sqm

Superstructure = 1,01,811 sqm

The Commercial block is 2B+G+2 storeys, and Tower 1 & 2 is 2B+G+27 storeys high.

This is to state that the above proposed IT Project plot no. A-3A, Sector -132, Noida, UP has been structurally vetted and found to be confirming to the relevant IS Structural Codes of practice as per the latest Indian Standards. All the stipulated combination of loads (static and dynamic) in vertical and lateral directions had been incorporated in the analysis and design. Above mention building has been checked and the provision in building are as relevant IS Codes for structural stability and earthquake resistance.

Yours Sincerely,

Sanjay Anil Digitally signed  
by Sanjay Anil  
Chikermane  
Date: 2024.09.02  
e 17:57:16 +05'30'

Dr. Sanjay Chikermane



M/s EXOTICA INFRATECH LLP

Date: 27-06-2024

H-63, Sector-63, Noida,  
Gautambudh Nagar, Uttar  
Pradesh - 201301

System Generated Auto Assessment for Height Clearance

1. Airports Authority of India (AAI) in pursuance of responsibility conferred by and as per the provisions of Govt. of India (Ministry of Civil Aviation) order GSR 751 (E) dated 30th Sep. 2015 for Safe and Regular Aircraft Operations has assessed the site data filled by the applicant.

2. Assessment details for Height Clearance:

NOC ID :	SAFD/NORTH/B/062224/1083268
Applicant Name*	Rakesh Kumar Jain
Site Address*	Plot-A-3A, Sector 132, Noida, Gautambudh Nagar, Uttar Pradesh
Site Coordinates*	28 30 33.76N 77 22 41.64E, 28 30 35.76N 77 22 43.29E, 28 30 28.68N 77 22 49.50E, 28 30 30.67N 77 22 51.16E
Site Elevation in mtrs AMSL as submitted by Applicant*	201.99 M
Type Of Structure*	Building

\*As provided by applicant

**Your site is located at a distance 19013 mts from ARP and lies in the grid P29 of the published CCZM of Safdarjung Airport airport. The Permitted top elevation for this grid is 355 mts.**

**Since the requested top elevation 342.34 mts in AMSL is below CCZM permitted top elevation, the NOC for height clearance is not required from Airports Authority of India.**

3. This assessment is subject to the terms and conditions as given below:

a. The site-elevation and site coordinates provided by the applicant are taken for calculation of the permissible top elevation for the proposed structure. If however, at any stage it is established that the actual data is different from the one provided by the applicant, this assessment will become invalid.

b. The Site coordinates as provided by the applicant in the NOC application has been plotted on the street view map and satellite map as shown in ANNEXURE. Applicant/Owner to ensure that the plotted coordinates corresponds to his/her site. In case of any discrepancy, this assessment shall be treated as null and void

c. Airport operator or his designated representative may visit the site (with prior coordination with applicant or owner) to ensure that assessment terms & conditions are complied with.

d. The assessment is further subject to the provisions of Section 9-A of the Indian Aircraft Act, 1934 and any notifications issued there under from time to time including the Aircraft (Demolition of Obstruction caused by Buildings and Trees etc.) Rules, 1994.



भारतीय विमानपत्तन प्राधिकरण  
AIRPORTS AUTHORITY OF INDIA

e. The applicant is responsible to obtain all other statutory clearances from the concerned authorities including the approval of building plans. This assessment for height is to ensure the safe and regular aircraft operations and shall not be used as document for any other purpose/claim whatsoever, including ownership of land etc.

f. Use of oil, electric or any other fuel which does not create smoke hazard for flight operations is obligatory, within 8 KM of the Aerodrome Reference Point.

g. This assessment has been issued w.r.t. the Civil Airports as notified in GSR 751(E). Applicant needs to seek separate NOC for Defence, if the site lies within jurisdiction of Defence Airport. Applicants also need to seek clearance from state Govt. as applicable, for sites which lies in the jurisdiction of unlicensed civil aerodrome as outlined in Rule 13 of GSR751 (E).

*This assessment is system auto generated and thus does not require any signature*

Designated Officer

Region Name: NORTH

Address: General Manager Airports  
Authority of India, Regional  
Headquarter, Northern Region,  
Operational Offices, Gurgaon  
Road, New Delhi-110037


Email ID: noc\_nr@aai.aero

Contact No: 011-25653551

Street View



June 22, 2024




AXI

Satellite View



June 22, 2024



AXI



सत्यमेव जयते

**File No: 9206**  
**Government of India**  
**Ministry of Environment, Forest and Climate Change**  
**(Issued by the State Environment Impact Assessment Authority(SEIAA),**  
**UTTAR PRADESH)**

\*\*\*



Dated 21/10/2024



To,

Shri Pankaj Rathore  
M/s exotica infratech llp  
228 basement, Jagriti Enclave Delhi, Delhi, EAST, DELHI, 110092  
exoticaeia132@gmail.com

**Subject:** Grant of EC under the provision of the EIA Notification 2006-regarding IT Building Project at Plot No. A-3A, Sector 132, Noida, District- Gautam Buddha Nagar, U.P., M/s Exotica Infratech LLP.

**Sir/Madam,**

This is in reference to your application for Grant of EC under the provision of the EIA Notification 2006-regarding in respect of project Proposed IT Building on Plot No. A-3A, Sector 132, Noida, Uttar Pradesh. submitted to Ministry vide proposal number SIA/UP/INFRA2/493819/2024 dated 24/08/2024.

2. The particulars of the proposal are as below :

(i) EC Identification No.	EC24C3803UP5908822N
(ii) File No.	9206
(iii) Clearance Type	EC
(iv) Category	B2
(v) Project/Activity Included Schedule No.	8(a) Building / Construction
(vii) Name of Project	Proposed IT Building on Plot No. A-3A, Sector 132, Noida, Uttar Pradesh.
(viii) Name of Company/Organization	exotica infratech llp
(ix) Location of Project (District, State)	GAUTAM BUDDHA NAGAR, UTTAR PRADESH
(x) Issuing Authority	SEIAA
(xii) Applicability of General Conditions	no
(xiii) Applicability of Specific Conditions	yes

3. In view of the particulars given in the Para 1 above, the project proposal interalia including Form-1(Part A and B) were submitted to the SEAC for appraisal under the provision of EIA notification 2006 and its subsequent amendments.

4. The above-mentioned proposal has been considered by SEAC in its meeting held on 03-09-2024. The minutes of the meeting and all the Application and documents submitted [(viz. Form-1 Part A, Part B, Part C EIA, EMP)] are available

on PARIVESH portal which can be accessed by scanning the QR Code above.

5. The brief about configuration of plant/equipment, products and by products and salient features of the project along with environment settings, as submitted by the Project proponent in Form-1 (Part A, B and C)/EIA & EMP Reports/presented during SEAC meeting are annexed to this EC as Annexure (2).

6. The SEAC, in its meeting held on 03-09-2024, based on information & clarifications provided by the project proponent and after detailed deliberations recommended the proposal for grant of EC under the provision of EIA Notification, 2006 and as amended thereof subject to stipulation of specific and general conditions as detailed in Annexure (1).

7. The SEIAA in its meeting held on 24-09-2024 has examined the proposal in accordance with the Environment Impact Assessment (EIA) Notification, 2006 & further amendments thereto and after accepting the recommendations of the SEAC hereby decided to grant EC for instant proposal of Shri Pankaj Rathore under the provisions of EIA Notification, 2006 and as amended thereof subject to stipulation of specific as detailed in Annexure (1).

8. The SEIAA, U.P. reserves the right to stipulate additional conditions, if found necessary.

9. The EC to the aforementioned project is under provisions of EIA Notification, 2006. It does not tantamount to approvals/consent/permissions etc. required to be obtained under any other Act/Rule/regulation. The Project Proponent is under obligation to obtain approvals /clearances under any other Acts/ Regulations or Statutes, as applicable, to the project.

10. General Instructions:-

a) The project proponent shall prominently advertise it at least in two local newspapers of the District or State, of which one shall be in the vernacular language within seven days indicating that the project has been accorded environment clearance and the details of SEIAA website where it is displayed.

b) The copies of the environmental clearance shall be submitted by the project proponents to the Heads of local bodies, Panchayats and Municipal Bodies in addition to the relevant offices of the Government who in turn must display the same for 30 days from the date of receipt.

c) Concealing factual data or submission of false/fabricated data may result in revocation of this environmental clearance and attract action under the provisions of Environment (Protection) Act, 1986.

d) The project proponent shall also ensure that the proposed site is not a part of any no-development zone as required/prescribed/identified under law. In case of violation, this permission shall automatically deem to be cancelled. Also, in the event of any dispute on ownership or land use of the proposed site, this clearance shall automatically deem to be cancelled.

e) Any appeal against this EC shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

f) The SEIAA reserves the right to revoke the environmental clearance, if conditions stipulated are not implemented to the satisfaction of SEIAA. SEIAA may impose additional environmental conditions or modify the existing ones, if necessary.

11. This issues with the approval of the Competent Authority.

**Annexure 1**

**Specific EC Conditions for (Building / Construction)**

### **1. Environmental Attributes**

<b>S. No</b>	<b>EC Conditions</b>
<b>1.1</b>	<ol style="list-style-type: none"><li>1. Project proponent is advised to explore the possibility and getting the cement in a closed container rather through the plastic bag to prevent dust emissions at the time of loading/unloading.</li><li>2. Project proponent should ensure that there will be no use of "Single use of Plastic" (SuP).</li><li>3. In compliance to Hon'ble Supreme Court order dated 13/01/2020 in IA no. 158128/2019 and 158129/2019 in Writ petition no. 13029/1985 (MC Mehta Vs. GoI and others) anti-smog guns shall be installed to reduce dust during excavation.</li><li>4. The project proponent will comply the use of fuel for backup power as per guidelines issued by CPCB from time to time.</li><li>5. The project proponent will ensure that there is no mismatch/deviation between the project proposal submitted to SEIAA for environmental clearance and maps/drawings were approved by</li></ol>

S. No	EC Conditions
	<p>concerned development authority. In case of any mismatch/deviation, amended environmental clearance will be obtained by project proponent. In case of failure, the granted environmental clearance shall automatically deem to be cancelled.</p> <p>6. The project proponent shall ensure that the project site does not attract/infringe any buffer zone, wetland zone etc. of no activity identified/declared under law.</p> <p>7. Criteria/ norms provided by competent Authority regarding the seismic zone are followed for construction work. Provision of alarm system, to timely notify the residents, in case of occurrence of earthquake/other natural disasters/fire should be provided. A well defined evacuation plan should also be prepared and regular mock drills should be arranged for the residents. Rise of stairs should be constructed in a way, so that it should provide smooth movement.</p> <p>8. The project proponent should develop green belt in the said project as per the plan submitted and also follow the guidelines of CPCB/Development authority for green belt as per the norms. The project proponent will prepare working plan of plantation/green belt development showing type of plant species and their spacing in consultation with subject expert/ forest department and submit to the forest department and concerned regulatory authority and ensure their survival and sustainability.</p> <p>9. The proponent should provide electric vehicle charging facility as per the requirements at ground level and allocate the safe and suitable place in the premises for the same.</p> <p>10. Project proponent should invest the CER amount as per the proposal and submit the compliance report regularly to the concerned authority/Directorate of environment.</p> <p>11. Proponent shall provide the dual pipeline network in the project for utilization of treated water of STP for different purposes and also provide the monitoring mechanism for the same. STP treated water not to be discharged outside the premises without the permission of the concerned authority.</p> <p>12. The project proponent will ensure full exploitation of potential of rain water harvesting for storage and recharging and also treated wastewater in order to reduce the withdrawal of fresh water and accordingly use the three sources of water supply namely stored rain water, treated wastewater and the fresh water. The project proponent shall also provide a flow measuring device along with flow integrator for monitoring the various sources of water supply namely fresh water, treated waste water and stored harvested rain water.</p> <p>13. The project proponent will ensure the quality of construction water as per standards and specifications of relevant codes in order to prevent possible corrosion in concrete, reinforcements and other structural components in order to avoid adverse social and environmental impacts.</p> <p>14. The project proponent will ensure exploitation of maximum possible potential of solar energy generation in the proposed project area and prefer to use it instead of conventional electricity in order to reduce the Green House Gas Emission causing climate change.</p> <p>15. The project proponent will make necessary arrangement to get Structural auditing conducted by an expert institution once in 05 years during life span of the building to ensure safe life of the residents and prevent environmental and social hazards.</p> <p>16. The project proponent shall plan for storm water management drained with appropriate slope and length so that the flood water could get a passage to release in a short span of time.</p>
1.2	<p>1- Plantation of saplings shall be carried out in earmarked 33% greenbelt area as a part of tree plantation campaign “Ek Ped Ma Ke Naam” and the details of the same shall be uploaded in the Meri LiFE Portal (<a href="https://merilife.nic.in">https://merilife.nic.in</a>) as per OM no. F.No.IA3-22/3/2024-IA.III (E-241594) dated 24.07.2024.</p> <p>2- The project proponent shall submit within the next 3 months the details on quantification of year wise CER activities along with cost and other details. The CER activities should be related to mitigation of Environmental Pollution and creating awareness for the need for same for example creation of water harvesting pits and carbon sequestration parks etc. At least one school in the vicinity of project area should be provided with rooftop solar plant, toilets should be constructed in public place or in school of nearby villages and if there is a girl’s school then girls toilet properly</p>

S. No	EC Conditions
	<p>equipped with overhead water tank should be constructed. Name of the school adopted for installation of roof top solar plant should be displayed on the website of project proponent and should also be submitted with periodic compliance report.</p> <p>3- The project proponent shall ensure that waste water is properly treated in STP and treated water should be reused for gardening flushing system, washing etc. For reuse of water, irrigation sprinkler and drip irrigation system shall be installed and maintained for proper functioning. Part of the treated sewage, if discharged to sewer line, shall meet the prescribed standards for the discharge and shall be done with necessary permissions from concerned authorities.</p> <p>4- Under any circumstances untreated sewage shall not be discharged to municipal sewer line or any nearby water body.</p> <p>5- The project proponent shall install organic bio converter.</p> <p>6- The effluent from STP after tertiary treatment shall be subjected to ozonation to avoid foul smell.</p> <p>7- Provision for charging of electric vehicles as per the guidelines of GoI/GoUP should be submitted within the next 3 months.</p> <p>8- The project proponent shall explore the possibility of solar electrification beyond 10% and if it is possible, shall submit the details of solar power plans within the next 3 months.</p> <p>9- In compliance to Hon'ble Supreme Court order dated 13/01/2020 in IA no. 158128/2019 and 158129/2019 in Writ petition no. 13029/1985 (MC Mehta Vs GOI and others) anti-smog guns shall be installed to reduce dust during excavation.</p> <p>10- DG sets shall be gas based and Guidelines issued by CAAQMS for NCR region regarding the use of DG sets during construction and operational phase should be followed.</p> <p>11- PP should display EC granted to them on their website.</p> <p>12- EC is granted with the condition that EC is valid only for the building plan which has been submitted by PP for seeking EC. In case approved building plan is different from the one submitted for seeking EC then this EC will stand null and void.</p> <p>13- <b>Project Proponent shall submit the Six-monthly Compliance on the Environment Clearance condition prescribed in the Prior Environment Clearance letter as per MoEF&amp;CC OM F.no- IAS-22/01/2022-IA-III (E-172624) Dated 14-06-2022.</b></p>

**Standard EC Conditions for (Building / Construction)**

**1. Statutory Compliance**

S. No	EC Conditions
1.1	The project proponent shall obtain all necessary clearance/ permission from all relevant agencies including town planning authority before commencement of work. All the construction shall be done in accordance with the local building byelaws.
1.2	The approval of the Competent Authority shall be obtained for structural safety of buildings due to earthquakes, adequacy of firefighting equipment etc. as per National Building Code including protection measures from lightening etc.
1.3	The project proponent shall obtain forest clearance under the provisions of Forest (Conservation) Act, 1980, in case of the diversion of forest land for non-forest purpose involved in the project.
1.4	The project proponent shall obtain clearance from the National Board for Wildlife, if applicable.
1.5	The project proponent shall obtain Consent to Establish / Operate under the provisions of Air (Prevention & Control of Pollution) Act, 1981 and the Water (Prevention & Control of Pollution)

S. No	EC Conditions
	Act, 1974 from the concerned State Pollution Control Board/ Committee.
1.6	The project proponent shall obtain the necessary permission for drawl of ground water / surface water required for the project from the competent authority.
1.7	A certificate of adequacy of available power from the agency supplying power to the project along with the load allowed for the project should be obtained.
1.8	All other statutory clearances such as the approvals for storage of diesel from Chief Controller of Explosives, Fire Department, Civil Aviation Department shall be obtained, as applicable, by project proponents from the respective competent authorities.
1.9	The provisions of the Solid Waste Management Rules, 2016, e-Waste (Management) Rules, 2016, and the Plastics Waste Management Rules, 2016, shall be followed.
1.10	The project proponent shall follow the ECBC/ECBC-R prescribed by Bureau of Energy Efficiency, Ministry of Power strictly.

## 2. Air Quality Monitoring And Preservation

S. No	EC Conditions
2.1	Notification GSR 94(E) dated 25.01.2018 of MoEF&CC regarding Mandatory Implementation of Dust Mitigation Measures for Construction and Demolition Activities for projects requiring Environmental Clearance shall be complied with.
2.2	A management plan shall be drawn up and implemented to contain the current exceedance in ambient air quality at the site.
2.3	The project proponent shall install system to carryout Ambient Air Quality monitoring for common/criterion parameters relevant to the main pollutants released (e.g. PM10 and PM2.5) covering upwind and downwind directions during the construction period.
2.4	Diesel power generating sets proposed as source of backup power should be of enclosed type and conform to rules made under the Environment (Protection) Act, 1986. The height of stack of DG sets should be equal to the height needed for the combined capacity of all proposed DG sets. Use of low sulphur diesel. The location of the DG sets may be decided with in consultation with State Pollution Control Board.
2.5	Construction site shall be adequately barricaded before the construction begins. Dust, smoke & other air pollution prevention measures shall be provided for the building as well as the site. These measures shall include screens for the building under construction, continuous dust/ wind breaking walls all around the site (at least 3-meter height). Plastic/tarpaulin sheet covers shall be provided for vehicles bringing in sand, cement, murrum and other construction materials prone to causing dust pollution at the site as well as taking out debris from the site.
2.6	Sand, murrum, loose soil, cement, stored on site shall be covered adequately so as to prevent dust pollution.

S. No	EC Conditions
2.7	Wet jet shall be provided for grinding and stone cutting.
2.8	Unpaved surfaces and loose soil shall be adequately sprinkled with water to suppress dust.
2.9	All construction and demolition debris shall be stored at the site (and not dumped on the roads or open spaces outside) before they are properly disposed. All demolition and construction waste shall be managed as per the provisions of the Construction and Demolition Waste Management Rules 2016.
2.10	The diesel generator sets to be used during construction phase shall be low sulphur diesel type and shall conform to Environmental (Protection) prescribed for air and noise emission standards.
2.11	The gaseous emissions from DG set shall be dispersed through adequate stack height as per CPCB standards. Acoustic enclosure shall be provided to the DG sets to mitigate the noise pollution. Low sulphur diesel shall be used. The location of the DG set and exhaust pipe height shall be as per the provisions of the Central Pollution Control Board (CPCB) norms.
2.12	For indoor air quality the ventilation provisions as per National Building Code of India.

### 3. Water Quality Monitoring And Preservation

S. No	EC Conditions
3.1	The natural drain system should be maintained for ensuring unrestricted flow of water. No construction shall be allowed to obstruct the natural drainage through the site, on wetland and water bodies. Check dams, bio-swales, landscape, and other sustainable urban drainage systems (SUDS) are allowed for maintaining the drainage pattern and to harvest rain water.
3.2	Buildings shall be designed to follow the natural topography as much as possible. Minimum cutting and filling should be done.
3.3	Total fresh water use shall not exceed the proposed requirement as provided in the project details.
3.4	The quantity of fresh water usage, water recycling and rainwater harvesting shall be measured and recorded to monitor the water balance as projected by the project proponent. The record shall be submitted to the Regional Office, MoEF&CC along with six monthly Monitoring reports.
3.5	A certificate shall be obtained from the local body supplying water, specifying the total annual water availability with the local authority, the quantity of water already committed, the quantity of water allotted to the project under consideration and the balance water available. This should be specified separately for ground water and surface water sources, ensuring that there is no impact on other users.
3.6	At least 20% of the open spaces as required by the local building bye-laws shall be pervious. Use of Grass pavers, paver blocks with at least 50% opening, landscape etc. would be considered as pervious surface.
3.7	Installation of dual pipe plumbing for supplying fresh water for drinking, cooking and bathing etc and other for supply of recycled water for flushing, landscape irrigation, car washing, thermal

S. No	EC Conditions
	cooling, conditioning etc. shall be done.
3.8	Use of water saving devices/fixtures (viz. low flow flushing systems; use of low flow faucets tap aerators etc) for water conservation shall be incorporated in the building plan.
3.9	Separation of grey and black water should be done by the use of dual plumbing system. In case of single stack system separate recirculation lines for flushing by giving dual plumbing system be done.
3.10	Water demand during construction should be reduced by use of pre-mixed concrete, curing agents and other best practices referred.
3.11	The local bye-law provisions on rain water harvesting should be followed. If local bye-law provision is not available, adequate provision for storage and recharge should be followed as per the Ministry of Urban Development Model Building Byelaws, 2016. Rain water harvesting recharge pits/storage tanks shall be provided for ground water recharging as per the CGWB norms.
3.12	A rain water harvesting plan needs to be designed where the recharge bores of minimum one recharge bore per 5,000 square meters of built up area and storage capacity of minimum one day of total fresh water requirement shall be provided. In areas where ground water recharge is not feasible, the rain water should be harvested and stored for reuse. The ground water shall not be withdrawn without approval from the Competent Authority.
3.13	All recharge should be limited to shallow aquifer.
3.14	No ground water shall be used during construction phase of the project.
3.15	Any ground water dewatering should be properly managed and shall conform to the approvals and the guidelines of the CGWA in the matter. Formal approval shall be taken from the CGWA for any ground water abstraction or dewatering.
3.16	The quantity of fresh water usage, water recycling and rainwater harvesting shall be measured and recorded to monitor the water balance as projected by the project proponent. The record shall be submitted to the Regional Office, MoEF&CC along with six monthly Monitoring reports.
3.17	Sewage shall be treated in the STP with tertiary treatment. The treated effluent from STP shall be recycled/re-used for flushing, AC make up water and gardening. As proposed, no treated water shall be disposed in to municipal drain.
3.18	No sewage or untreated effluent water would be discharged through storm water drains.
3.19	Onsite sewage treatment of capacity of treating 100% waste water to be installed. The installation of the Sewage Treatment Plant (STP) shall be certified by an independent expert and a report in this regard shall be submitted to the Ministry before the project is commissioned for operation. Treated waste water shall be reused on site for landscape, flushing, cooling tower, and other end-uses. Excess treated water shall be discharged as per statutory norms notified by Ministry of Environment, Forest and Climate Change. Natural treatment systems shall be promoted.
3.20	Periodical monitoring of water quality of treated sewage shall be conducted. Necessary measures should be made to mitigate the odour problem from STP.

S. No	EC Conditions
3.21	Sludge from the onsite sewage treatment, including septic tanks, shall be collected, conveyed and disposed as per the Ministry of Urban Development, Central Public Health and Environmental Engineering Organization (CPHEEO) Manual on Sewerage and Sewage Treatment Systems, 2013.

#### 4. Noise Monitoring And Prevention

S. No	EC Conditions
4.1	Ambient noise levels shall conform to residential area/commercial area/industrial area/silence zone both during day and night as per Noise Pollution (Control and Regulation) Rules, 2000. Incremental pollution loads on the ambient air and noise quality shall be closely monitored during construction phase. Adequate measures shall be made to reduce ambient air and noise level during construction phase, so as to conform to the stipulated standards by CPCB / SPCB.
4.2	Noise level survey shall be carried as per the prescribed guidelines and report in this regard shall be submitted to Regional Officer of the Ministry as a part of six-monthly compliance report.
4.3	Acoustic enclosures for DG sets, noise barriers for ground-run bays, ear plugs for operating personnel shall be implemented as mitigation measures for noise impact due to ground sources.

#### 5. Energy Conservation Measures

S. No	EC Conditions
5.1	Compliance with the Energy Conservation Building Code (ECBC) of Bureau of Energy Efficiency shall be ensured. Buildings in the States which have notified their own ECBC, shall comply with the State ECBC.
5.2	Outdoor and common area lighting shall be LED.
5.3	Concept of passive solar design that minimize energy consumption in buildings by using design elements, such as building orientation, landscaping, efficient building envelope, appropriate fenestration, increased day lighting design and thermal mass etc. shall be incorporated in the building design. Wall, window, and roof u-values shall be as per ECBC specifications.
5.4	Energy conservation measures like installation of CFLs/ LED for the lighting the area outside the building should be integral part of the project design and should be in place before project commissioning.
5.5	Solar, wind or other Renewable Energy shall be installed to meet electricity generation equivalent to 1% of the demand load or as per the state level/ local building bye-laws requirement, whichever is higher.
5.6	Solar power shall be used for lighting in the apartment to reduce the power load on grid. Separate electric meter shall be installed for solar power. Solar water heating shall be provided to meet 20% of the hot water demand of the commercial and institutional building or as per the requirement of the local building bye-laws, whichever is higher. Residential buildings are also recommended to meet its hot water demand from solar water heaters, as far as possible.

## 6. Waste Management

S. No	EC Conditions
6.1	A certificate from the competent authority handling municipal solid wastes, indicating the existing civic capacities of handling and their adequacy to cater to the M.S.W. generated from project shall be obtained.
6.2	Disposal of muck during construction phase shall not create any adverse effect on the neighbouring communities and be disposed taking the necessary precautions for general safety and health aspects of people, only in approved sites with the approval of competent authority.
6.3	Separate wet and dry bins must be provided in each unit and at the ground level for facilitating segregation of waste. Solid waste shall be segregated into wet garbage and inert materials.
6.4	Organic waste compost/Vermiculture pit/Organic Waste Converter within the premises with a minimum capacity of 0.3 kg /person/day must be installed.
6.5	All non-biodegradable waste shall be handed over to authorized recyclers for which a written tie up must be done with the authorized recyclers.
6.6	Any hazardous waste generated during construction phase, shall be disposed off as per applicable rules and norms with necessary approvals of the State Pollution Control Board.
6.7	Use of environment friendly materials in bricks, blocks and other construction materials, shall be required for at least 20% of the construction material quantity. These include Fly Ash bricks, hollow bricks, AACs, Fly Ash Lime Gypsum blocks, Compressed earth blocks, and other environment friendly materials.
6.8	Fly ash should be used as building material in the construction as per the provision of Fly Ash Notification of September, 1999 and amended as on 27th August, 2003 and 25th January, 2016. Ready mixed concrete must be used in building construction.
6.9	Any wastes from construction and demolition activities related thereto shall be managed so as to strictly conform to the Construction and Demolition Waste Management Rules, 2016.
6.10	Used CFLs and TFLs should be properly collected and disposed off/sent for recycling as per the prevailing guidelines/ rules of the regulatory authority to avoid mercury contamination.

## 7. Green Cover

S. No	EC Conditions
7.1	No tree can be felled/transplant unless exigencies demand. Where absolutely necessary, tree felling shall be with prior permission from the concerned regulatory authority. Old trees should be retained based on girth and age regulations as may be prescribed by the Forest Department. Plantations to be ensured species (cut) to species (planted).
7.2	A minimum of 1 tree for every 80 sqm of land should be planted and maintained. The existing trees will be counted for this purpose. The landscape planning should include plantation of native species. The species with heavy foliage, broad leaves and wide canopy cover are desirable. Water intensive

S. No	EC Conditions
	and/or invasive species should not be used for landscaping.
7.3	Where the trees need to be cut with prior permission from the concerned local Authority, compensatory plantation in the ratio of 1:10 (i.e. planting of 10 trees for every 1 tree that is cut) shall be done and maintained. Plantations to be ensured species (cut) to species (planted). Area for green belt development shall be provided as per the details provided in the project document.
7.4	Topsoil should be stripped to a depth of 20 cm from the areas proposed for buildings, roads, paved areas, and external services. It should be stockpiled appropriately in designated areas and reapplied during plantation of the proposed vegetation on site.

## 8. Transport

S. No	EC Conditions
8.1	A comprehensive mobility plan, as per MoUD best practices guidelines (URDPFI), shall be prepared to include motorized, non-motorized, public, and private networks. Road should be designed with due consideration for environment, and safety of users. The road system can be designed with these basic criteria. a. Hierarchy of roads with proper segregation of vehicular and pedestrian traffic. b. Traffic calming measures. c. Proper design of entry and exit points. d. Parking norms as per local regulation.
8.2	Vehicles hired for bringing construction material to the site should be in good condition and should have a pollution check certificate and should conform to applicable air and noise emission standards be operated only during non-peak hours.

## 9.

S. No	EC Conditions
9.1	A detailed traffic management and traffic decongestion plan shall be drawn up to ensure that the current level of service of the roads within a 05 kms radius of the project is maintained and improved upon after the implementation of the project. This plan should be based on cumulative impact of all development and increased habitation being carried out or proposed to be carried out by the project or other agencies in this 05 Kms radius of the site in different scenarios of space and time and the traffic management plan shall be duly validated and certified by the State Urban Development department and the P.W.D./ competent authority for road augmentation and shall also have their consent to the implementation of components of the plan which involve the participation of these departments.

## 10. Human Health Issues

S. No	EC Conditions
10.1	All workers working at the construction site and involved in loading, unloading, carriage of construction material and construction debris or working in any area with dust pollution shall be provided with dust mask.

S. No	EC Conditions
10.2	For indoor air quality the ventilation provisions as per National Building Code of India.
10.3	Emergency preparedness plan based on the Hazard identification and Risk Assessment (HIRA) and Disaster Management Plan shall be implemented.
10.4	Provision shall be made for the housing of construction labour within the site with all necessary infrastructure and facilities such as fuel for cooking, mobile toilets, mobile STP, safe drinking water, medical health care, crèche etc. The housing may be in the form of temporary structures to be removed after the completion of the project.
10.5	Occupational health surveillance of the workers shall be done on a regular basis.
10.6	A First Aid Room shall be provided in the project both during construction and operations of the project.


### 11. Miscellaneous

S. No	EC Conditions
11.1	The project proponent shall prominently advertise it at least in two local newspapers of the District or State, of which one shall be in the vernacular language within seven days indicating that the project has been accorded environment clearance and the details of MoEFCC/SEIAA website where it is displayed.
11.2	ii. environmental clearance shall be submitted by the project proponents to the Heads of local bodies, Panchayats and Municipal Bodies in addition to the relevant offices of the Government who in turn has to display the same for 30 days from the date of receipt.
11.3	The project proponent shall upload the status of compliance of the stipulated environment clearance conditions, including results of monitored data on their website and update the same on half-yearly basis.
11.4	The project proponent shall submit six-monthly reports on the status of the compliance of the stipulated environmental conditions on the website of the ministry of Environment, Forest and Climate Change at environment clearance portal.
11.5	The company shall have a well laid down environmental policy duly approved by the Board of Directors. The environmental policy should prescribe for standard operating procedures to have proper checks and balances and to bring into focus any infringements/deviation/violation of the environmental/forest/wildlife norms/conditions. The company shall have defined system of reporting infringements/deviation/violation of the environmental/forest/wildlife norms/conditions and/or shareholders/stake holders. The copy of the board resolution in this regard shall be submitted to the MoEF&CC as a part of six-monthly report.
11.6	A separate Environmental Cell both at the project and company head quarter level, with qualified personnel shall be set up under the control of senior Executive, who will directly report to the head of the organization.
11.7	Action plan for implementing EMP and environmental conditions along with responsibility matrix

S. No	EC Conditions
	of the company shall be prepared and shall be duly approved by competent authority. The year wise funds earmarked for environmental protection measures shall be kept in separate account and not to be diverted for any other purpose. Year wise progress of implementation of action plan shall be reported to the Ministry/Regional Office along with the Six Monthly Compliance Report
11.8	The project proponent shall submit the environmental statement for each financial year in Form-V to the concerned State Pollution Control Board as prescribed under the Environment (Protection) Rules, 1986, as amended subsequently and put on the website of the company.
11.9	The project proponent shall inform the Regional Office as well as the Ministry, the date of financial closure and final approval of the project by the concerned authorities, commencing the land development work and start of production operation by the project.
11.10	The project authorities must strictly adhere to the stipulations made by the State Pollution Control Board and the State Government.
11.11	The project proponent shall abide by all the commitments and recommendations made in the EIA/EMP report and also that during their presentation to the Expert Appraisal Committee.
11.12	No further expansion or modifications in the plant shall be carried out without prior approval of the Ministry of Environment, Forest and Climate Change (MoEF&CC).
11.13	Concealing factual data or submission of false/fabricated data may result in revocation of this environmental clearance and attract action under the provisions of Environment (Protection) Act, 1986.
11.14	The Ministry may revoke or suspend the clearance, if implementation of any of the above conditions is not satisfactory.
11.15	The Ministry reserves the right to stipulate additional conditions if found necessary. The Company in a time bound manner shall implement these conditions.
11.16	The Regional Office of this Ministry shall monitor compliance of the stipulated conditions. The project authorities should extend full cooperation to the officer (s) of the Regional Office by furnishing the requisite data / information/monitoring reports.
11.17	The above conditions shall be enforced, inter-alia under the provisions of the Water (Prevention & Control of Pollution) Act, 1974, the Air (Prevention & Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986, Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016, and the Public Liability Insurance Act, 1991 along with their amendments and Rules and any other orders passed by the Hon'ble Supreme Court of India / High Courts and any other Court of Law relating to the subject matter.
11.18	Any appeal against this EC shall lie with the National Green Tribunal, if preferred, within a period of 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

## 12. Specific Conditions

S. No	EC Conditions
12.1	Recommendations of mitigation measures from possible accident shall be implemented based on Risk Assessment studies conducted for worst case scenarios using latest techniques.

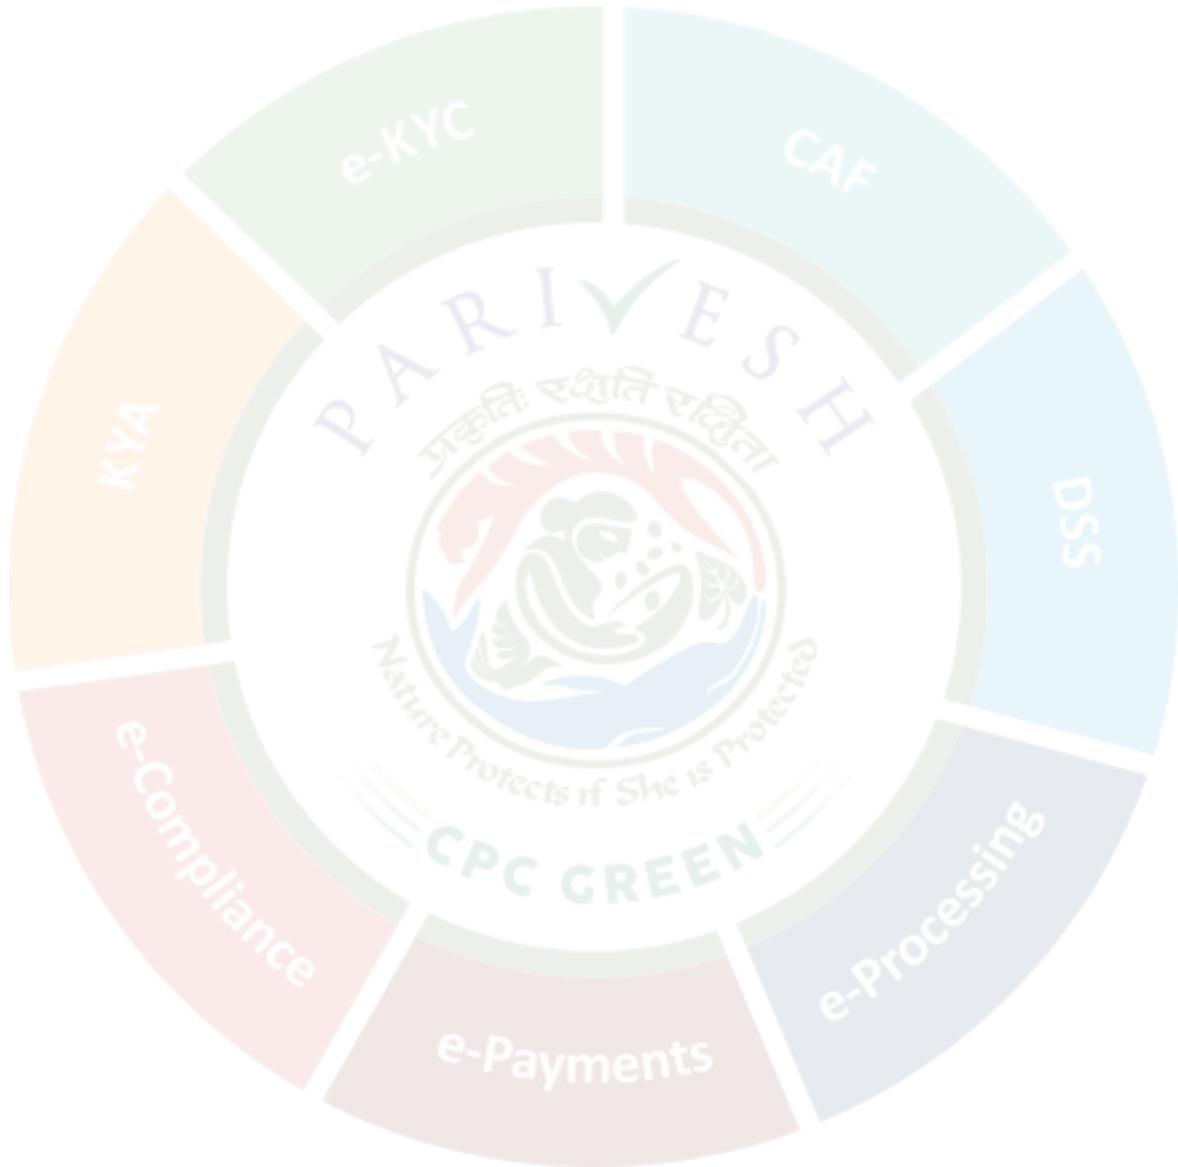

## Annexure- 2

A presentation was made by the project proponent along with their consultant M/s Ind Tech House Consult, Delhi to SEAC on 03-09-2024.

### **Project Details Informed by the Project Proponent and their Consultant**

The project proponent, through the documents and presentation gave following details about their project –

1. The environmental clearance is sought for IT Building Project at Plot No. A-3A, Sector 132, Noida, District- Gautam Buddha Nagar, U.P., M/s Exotica Infratech LLP.
2. Total plot area of the project is 20,242.6 m<sup>2</sup> and proposed built-up- area is 1,33,622.829 m<sup>2</sup>.
3. Maximum number of floors will be 2B+G/PO/MLCP+26+Sky Lounge and maximum height of the building will be 134.35 m.
4. Salient features of the project:

SN	Description	Particulars	Unit
<b>GENERAL</b>			
1.	Plot Area	20242.60	SQM
2.	Proposed Built Up Area	133622.829	SQM
3.	Number of Building Blocks	2 Tower +Commercial	NOS
4.	Max Height of Building	134.35	M
5.	Max No of Floors	2B+G/PO/MLCP+26+Sky Lounge	NOS
6.	Cost of Project	350	CR
7.	Expected Population	9285	PERSONS
8.	Permissible Ground Coverage Area (@35%)	7084.91	SQM
9.	Proposed Ground Coverage Area (@35%)	7084.91	SQM
10.	Permissible FAR Area (@3.675)	74391.56	SQM
11.	Proposed FAR Area	74391.56	SQM
12.	Proposed NoN FAR Area	48603.909	SQM
13.	Proposed Built Up Area	133622.829	SQM
<b>WATER</b>			
14.	Total Water Requirement	902	KLD
15.	Fresh water requirement	251	KLD
16.	Treated water requirement	651	KLD
17.	Waste water Generation	330	KLD
18.	Proposed STP Capacity	400	KLD
19.	Treated Water Available for Reuse	297	KLD
20.	Additional Treated water requirement	354	KLD
<b>RAIN WATER HARVESTING</b>			
21.	Rain Water Harvesting Potential	134.63	CUM
22.	No of RWH of Pits Proposed	5	NOS
<b>PARKING</b>			
23.	Total Parking required	1488	ECS
24.	Total Proposed Parking	1748	ECS
25.	Proposed Surface Parking	140	ECS
26.	Proposed Podium Parking	259	ECS
27.	Proposed Basements Parking (Stack/MLCP)	1349	ECS
<b>GREEN AREAS</b>			
28.	Required Green Area (32.50% of the total plot area)	6578.845	SQM
29.	Proposed Green Area (32.51% of Plot Area)	6580.51	SQM
<b>WASTE GENERATION</b>			
30.	Municipal Solid Waste Generation	2.20	TPD

31.	Bio Degradable waste	1.03	TPD
32.	Quantity of Sludge Generated from STP	32.24	KG/DAY
POWER			
33.	Total Power Requirement	8911.7	KW
34.	DG set backup	14020	KVA

5. Population details:

POPULATION			
NON RESIDENTIAL	FAR	RATE	Nos.
Retail Ground floor (Front)	2723.239	3	91
Retail Upper Floors (Front)	2652.25	6	44
Tower 1			
Ground floor Retail	353.797	3	12
Upper floor retail	2652.25	6	44
Office Staff	32138.94	10	2893
Sky Lounge/Res. Staff (T1+T2)			61
Tower 2			
Office Staff	35602.162	10	3204
TOTAL			6348
VISITORS			
Visitor retail			1719
Office visitors			610
Sky Lounge/rest. Visitors (T1 + T2)	851.46	1.4	608
TOTAL VISITORS			2937
TOTAL POPULATION			9285

6. Water Requirement Details:

	POPULATION/ AREA/UNIT	RATE IN LTS	TOTAL QTY IN KL
NON-RESIDENTIAL (Working)			
DOMESTIC	6348	25	158.7
FLUSHING	6348	20	126.96
VISITORS			
DOMESTIC	2328	5	11.64
FLUSHING	2328	10	23.28
RESTAURANT			
DOMESTIC	608	55	33.44
FLUSHING	608	15	9.12
TOTAL POPULATION			9285
SWIMMING POOL			37.00
FILTER BACKWASH			10.00
GARDENING	6580.51	5	32.90
DG COOLING	14400	0.25	14.40
SOFT WATER REQUIREMENT (FOR HVAC COOLING IN COMMERCIAL & OFFICES)			444.00
TOTAL WATER REQUIREMENT			901.44
SN	Source		Quantity (kld)
1	Fresh water from municipal supply		251
2	Recycle of treated water from on site STP		297
3	Additional treated water sourced from tankers		354
	Total water source		902

7. Landscape Plan:

Plot Area	20242.60 m2
-----------	-------------

Proposed Green Area (32.5 % of plot area)	6580.51 m <sup>2</sup>
Required No of Trees	253
Proposed No. of trees	255

8. Parking details:

Sl. No.	Description	Total Quantity	Unit
1.	Total Parking required	1488	ECS
2.	Total Proposed Parking	1748	ECS
3.	Proposed Surface Parking	140	ECS
4.	Proposed Podium Parking	259	ECS
5.	Proposed Basements Parking and MLCP	1349	ECS

9. Solid waste details:

Waste Category	Quantity	Unit
Total Solid Waste Generation	2.20	TPD
Organic waste	1.03	TPD
Quantity of Sludge Generated from STP	32.24	KG/DAY

10. Action Plan as per Ministry's O.M. dated 30/09/2020:

S. N.	Expenditure	Amount (Lacs)	2025	2026	2027
1.	Sanitation (preparation of toilets) in Village Nagla Nagli	85	30	30	25
2.	Health (Medical Camp) in Village Nagla Bahrapur	90	30	30	30
3.	Installation of solar lights in Govt. schools in Village Nagla Nagli	95	30	30	35
4.	Solid waste management facility (provision of supply of OWC in schools) in Village Nagli Sbabur	85	30	30	25
5.	Development of smart classes in schools in Village Nagla Bahrapur	90	30	30	30
6.	Avenue Plantation/ plantation in community area	80	30	30	20
	Total	525	180	180	165

11. The project proposal falls under category-8(a) of EIA Notification, 2006 (as amended).

**Copy, through email, for information and necessary action to –**

1. **Additional Chief Secretary, Department of Environment, Forest and Climate Change, Government of Uttar Pradesh, Lucknow (email – psforest2015@gmail.com)**
2. **Joint Secretary, Ministry of Environment, Forest and Climate Change, Government of India, 3rd Floor, Prithvi-Block, Indira Paryavaran Bhawan, Jor Bagh Road, New Delhi-110003 (email – sudheer.ch@gov.in)**
3. **Deputy Director General of Forests (C), Integ rated Regional Office, Ministry of Environment, Forest and Climate Change, Kendriya Bhawan, 5th Floor, Sector “H”, Aliganj, Lucknow – 226020 (email – rocz.lko-mef@nic.in)**
4. **District Magistrate, G.B. Nagar.**
5. **Member Secretary, Uttar Pradesh Pollution Control Board, TC-12V, Paryavaran Bhawan, Vibhuti Khand, Gomti Nagar, Lucknow-226010 (email – ms@uppcb.in)**
6. **Copy for Guard File.**

Signature Not Verified

Digitally Signed by: Mr. Ajay Kumar Sharma, Member Secretary, SEIAA

Date: 21/10/2024