PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

SHEET NO. -SD- 29

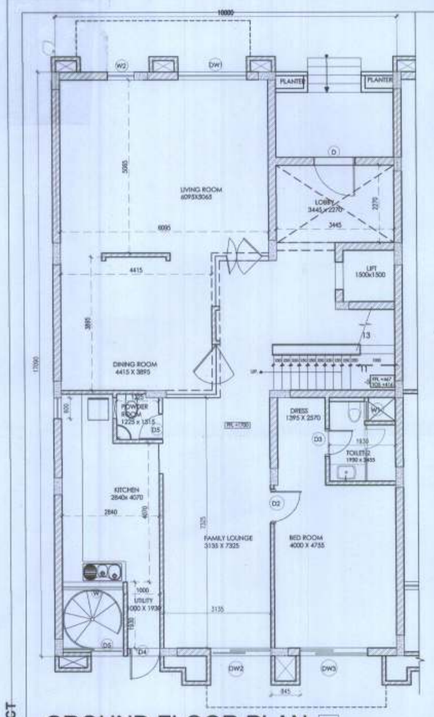

GROUND FLOOR PLAN

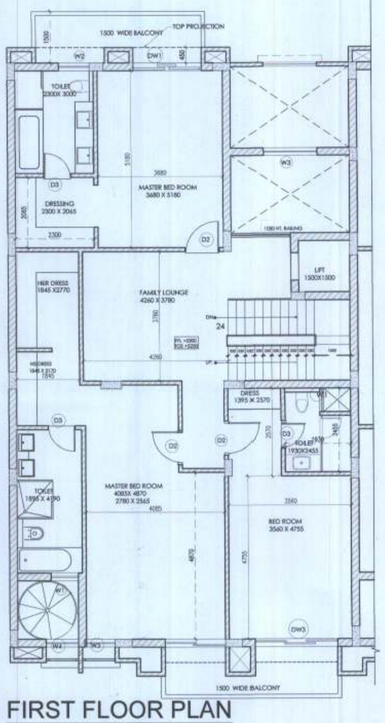

FIRST FLOOR PLAN

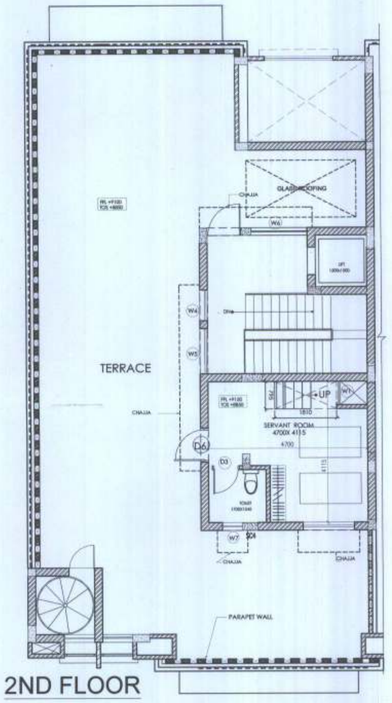

2ND FLOOR

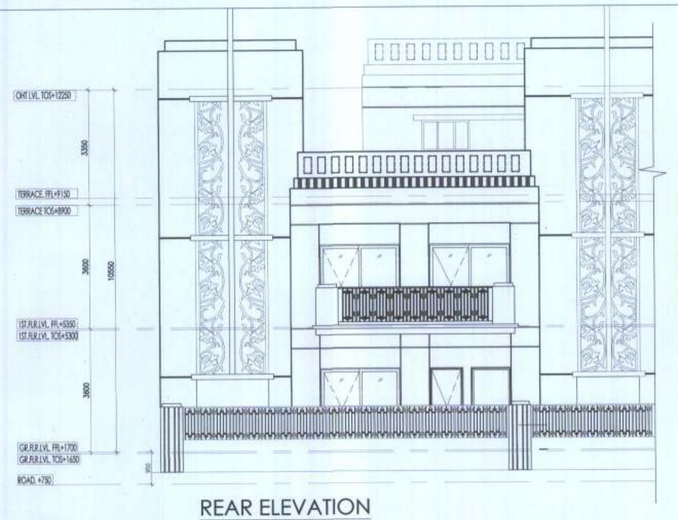

REAR ELEVATION

ROW HOUSE DOOR WINDOW SCHEDULE						
NO.	TYPE	SIZE			CILL	LINTEL
1	D	1200	x	2400	0	2400
2	D2	1000	x	2400	0	2400
3	D3	800	x	2100	0	2400
4	D4	1100	x	2100	0	2400
5	D5	900	x	2100	0	2400
6	D6	1000	x	2100	0	2400
7	W	1730	x	1200	1200	2400
8	W2	600	x	1200	1200	2400
9	W2	900	x	1200	1200	2400
10	W3	2000	x	2400	0	2400
11	W5	1322	x	1200	1200	2400
12	W6	1780	x	1200	1200	2400
13	DW1	2450	x	2400	0	2400
14	DW2	2550	x	2400	0	2400
15	DW3	2850		2400	0	2400

Greater Noida Industrial Development Authority
Vide Letter No. ... dt. ...
Valid upto Date ...
APPROVED
DGM (Plng. & Arch.)
Drawing Checked & Approved by
Dy. Dir. (Plans)

GROUND FLOOR AREA CALCULATION					
	L(mm)	W(mm)	NOS		AREA (SQM)
ENVELOP AREA					
A	6.440	2.495		=	16.068
B	10.000	14.595		=	145.950
P1	0.450	0.115	9	=	0.466
P2	0.615	0.115	3	=	0.212
P3	0.550	0.115	1	=	0.063
P4	0.830	0.115	1	=	0.095
P5	0.115	0.335	1	=	0.039
P6	0.640	0.115	1	=	0.074
P7	0.615	0.115	2	=	0.141
P8	0.115	0.850	4	=	0.391
P9	0.115	0.400	1	=	0.046
P10	0.425	0.115	1	=	0.049
TOTAL				=	163.594 .....(A)
DEDUCTION					
1	0.785	0.682	1	=	0.535
TOTAL				=	0.535 .....(B)
15% SERVICES AREA					
M1	1.680	1.430	1	=	2.402
M2	1.715	1.960	1	=	3.361
S1	0.425	0.735	1	=	0.312
S2	0.615	0.735	1	=	0.452
S3	0.615	0.735	1	=	0.452
S4	0.635	0.335	1	=	0.213
S5	0.830	0.335	1	=	0.278
S6	0.615	0.335	3	=	0.618
S7	0.550	0.335	1	=	0.184
TOTAL				=	8.273 .....(D)
TOTAL FAR AREA (A-B)				=	163.059 .....(R)
TOTAL SERVICES AREA (D)				=	8.273 .....(U)
GROUND COVERAGE				=	171.332 .....(X)

FIRST FLOOR AREA CALCULATION					
	L(mm)	W(mm)	NOS		AREA (SQM)
ENVELOP AREA					
A	6.440	2.495		=	16.068
B	10.000	14.595		=	145.950
P1	0.450	0.115	9	=	0.466
P2	0.615	0.115	3	=	0.212
P3	0.550	0.115	1	=	0.063
P4	0.830	0.115	1	=	0.095
P5	0.115	0.335	1	=	0.039
P6	0.640	0.115	1	=	0.074
P7	0.615	0.115	2	=	0.141
P8	0.115	0.850	4	=	0.391
P9	0.115	0.400	1	=	0.046
P10	0.425	0.115	1	=	0.049
TOTAL				=	163.594 .....(A)
DEDUCTION					
1	0.785	0.682	1	=	0.535
2	1.500	1.500	1	=	2.250
3	1.780	1.695	1	=	3.017
TOTAL				=	5.802 .....(B)
15% SERVICES AREA					
M1	1.680	1.430	1	=	2.402
M2	1.715	1.960	1	=	3.361
S1	0.425	0.735	1	=	0.312
S2	0.615	0.735	1	=	0.452
S3	0.615	0.735	1	=	0.452
S4	0.635	0.335	1	=	0.213
S5	0.830	0.335	1	=	0.278
S6	0.615	0.335	3	=	0.618
S7	0.550	0.335	1	=	0.184
TOTAL				=	8.273 .....(D)
TOTAL FAR AREA (A-B)				=	157.791 .....(S)
TOTAL SERVICES AREA (D)				=	8.273 .....(V)

SECOND FLOOR AREA CALCULATION					
	L(mm)	W(mm)	NOS		AREA (SQM)
ENVELOP AREA					
	5.135	8.840		=	45.393
TOTAL				=	45.393 .....(A)
DEDUCTION					
1	1.500	1.500	1	=	2.250
2	0.785	0.682	1	=	0.535
TOTAL				=	2.785 .....(B)
SERVICES AREA					
M1	3.407	1.960	1	=	6.678
M3	2.190	2.160	1	=	4.730
TOTAL				=	11.408 .....(C)
TOTAL FAR AREA (A-B-C)				=	31.200 .....(T)

TOTAL FAR AREA (R+S+T)	=	352.050	.....(M)
TOTAL SERVICES AREA (U+V+W)	=	27.954	.....(N)
TOTAL FAR AREA OF 14 ROW HOUSE (MX14)	=	4928.700	
TOTAL SERVICES AREA OF 14 ROW HOUSE (NX14)	=	391.356	

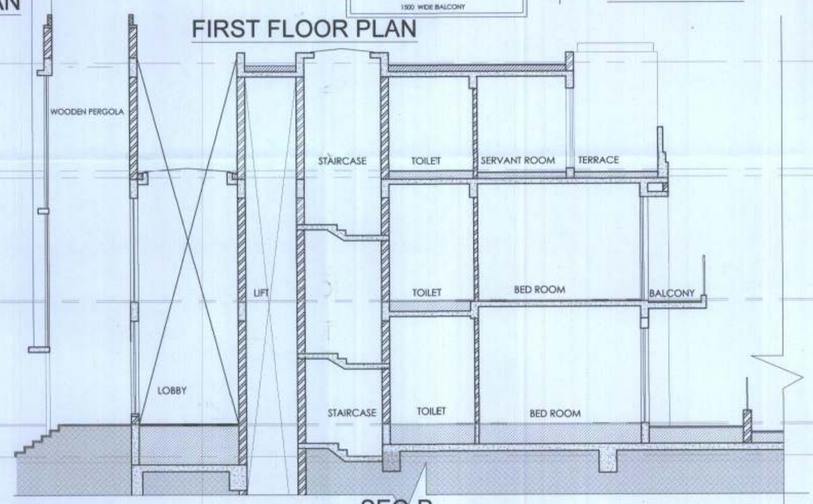

SEC-P

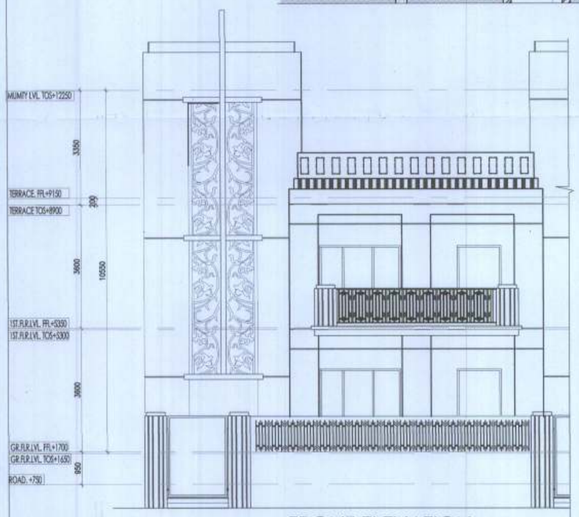

FRONT ELEVATION

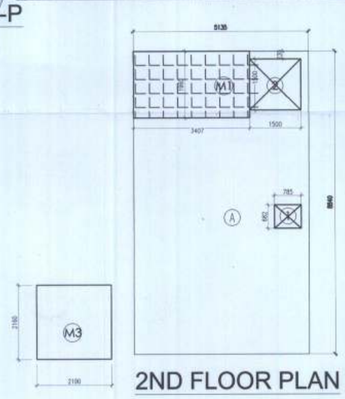

2ND FLOOR PLAN

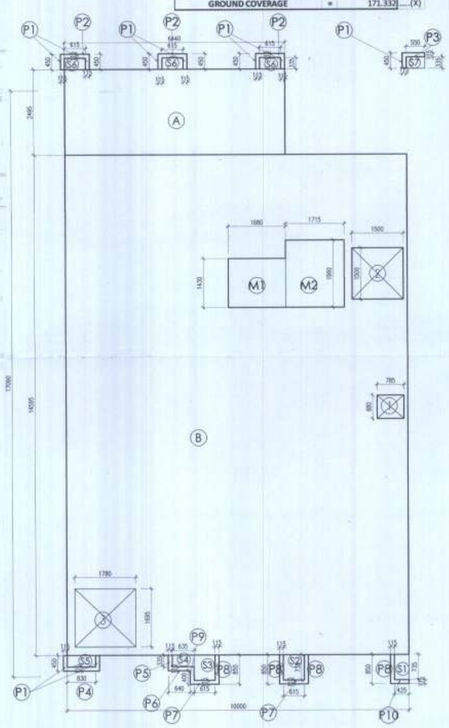

FIRST FLOOR BLOCK PLAN

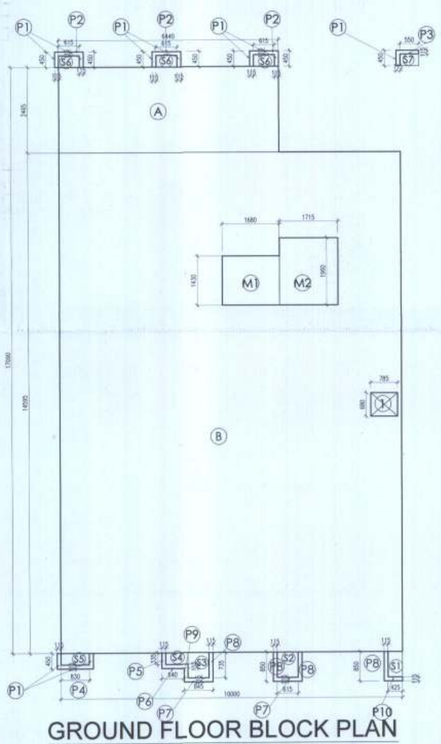

GROUND FLOOR BLOCK PLAN

REVISED SUBMISSION

OWNER:
M/s DOMUS GREENS PVT. LTD.
711/92, Deepali, Nehru Place, New Delhi - 110019

PROJECT:
PROPOSED GROUP HOUSING AT PLOT NO. 12A, SECTOR - ZETA -01 GREATER NOIDA

SHEET TITLE
ROW HOUSE

ARCHITECT'S SIGNATURE
MANISH KUMAR GUPTA
CA/2005/35549

OWNER'S SIGNATURE
For Domus Greens Pvt. Ltd.
Authorised Signatory

DEALT BY	SCALE - 1:100 @ A1	NORTH
CHECKED BY	DATE -	

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT