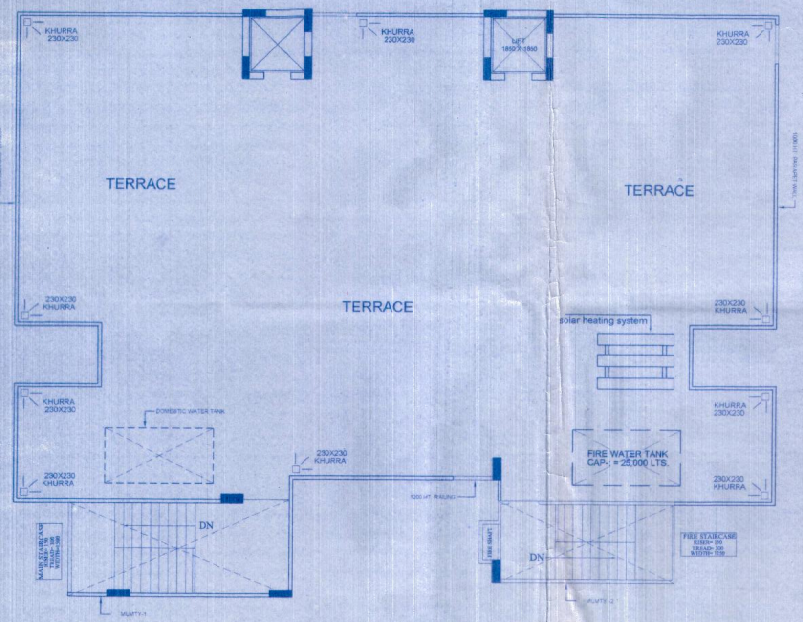

TERRACE FLOOR PLAN
(PROPOSED)

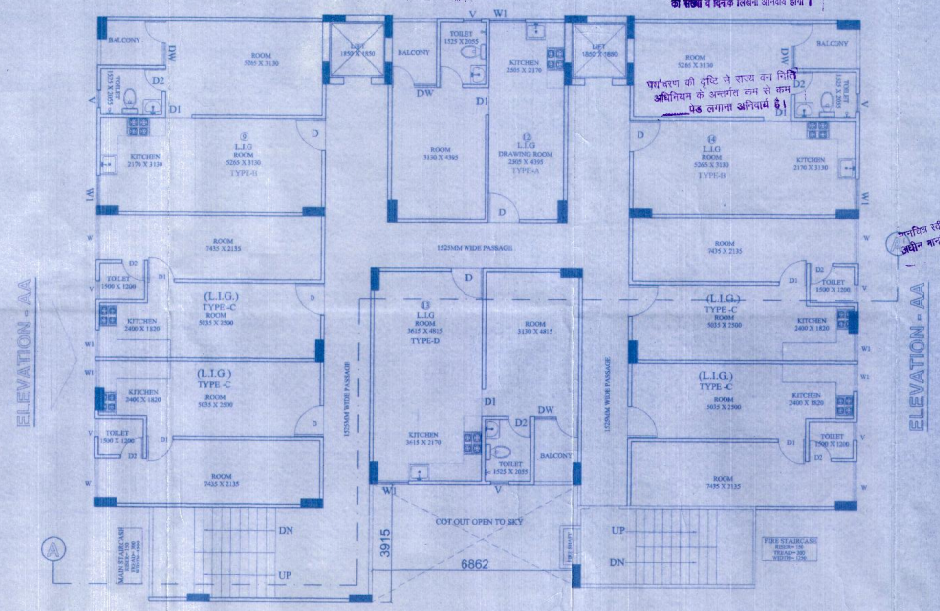

4th TO 7th FLOOR PLAN
(PROPOSED)

S.NO.	FLOORS	AREA (sq.mt.)	%
1.	STILT /GROUND FLOOR		
	NON F.A.R. AREA		
	RESIDENTIAL AREA	400.79	
3.	1st FLOOR		13
4.	2nd FLOOR	434.58	13
5.	3rd FLOOR	431.26	10
6.	4th FLOOR	430.77	08
7.	5th FLOOR	430.77	08
8.	6th FLOOR	430.77	08
9.	7th FLOOR	430.77	08
TOTAL AREA (2 TO 9)		3424.29	80

(1nd FLOOR) CIRCULATION DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	2.080 X 8.435 X 2	35.08
2	1.525 X 7.215 X 2	22.00
3	1.640 X 3.915	6.42
4	5.825 X 3.115	18.14
5	5.980 X 1.525	9.11
6	1.640 X 3.415	5.60
	TOTAL	96.35

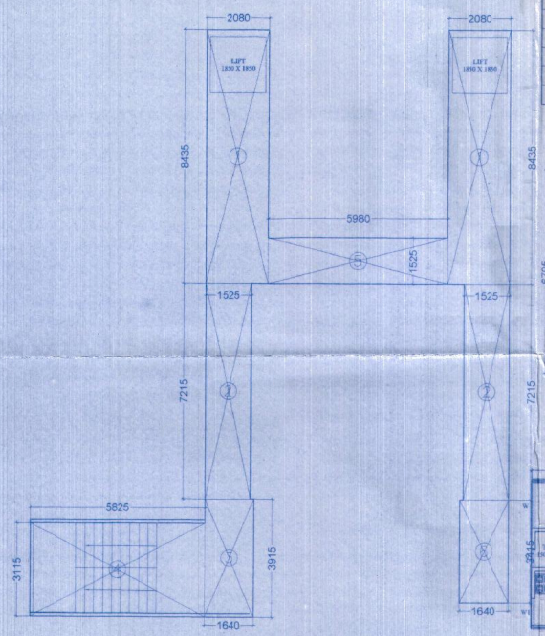

GROUND TO 7TH FLOOR PLAN



(E.W.S.) TYPE - 1

(TYPE - 1) E.W.S. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	7.665 X 3.305	25.33
	TOTAL	25.33



(E.W.S.) TYPE - 2

(TYPE - 2) E.W.S. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	3.545 X 7.215	25.57
	TOTAL	25.57



(L.I.G.) TYPE - A

(TYPE - A) L.I.G. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	5.980 X 6.795	40.63
	TOTAL	40.63

(TYPE - B) L.I.G. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	7.665 X 6.545	50.16
	TOTAL	50.16



(L.I.G.) TYPE - B



(L.I.G.) TYPE - C

(TYPE - C) L.I.G. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	7.665 X 4.865	37.29
	TOTAL	37.29

(TYPE - D) L.I.G. AREA DETAIL

S. NO.	DIMENSION	AREA (SQ. MTR)
1	7.090 X 7.215	51.15
	TOTAL	51.15



(L.I.G.) TYPE - D

AREA DETAIL

4th to 7th FLOOR

TYPES OF UNITS	Flat Area	NO.OF UNITS	AREA IN (SQ.MT.)
Type - A(LIG)	40.63	01 No.	40.63 Sq. MT.
Type - B(LIG)	50.16	02 No.	100.32 Sq. MT.
Type - C(LIG)	37.29	04 No.	149.16 Sq. MT.
Type - D(LIG)	51.15	01 No.	51.15 Sq. MT.
TOTAL AREA (Flat)		08 No.	341.26 Sq. MT.
CIRRCULATION AREA		=	96.35 Sq.MT.
TOTAL TOTAL FLOOR AREA		=	437.61 SQ.MT.
LIFT - 1 = (1.850 X 1.850) x 2		=	6.84 SQ.MT.
TOTAL LIFT AREA		=	6.84 SQ.MT.

4th. TO 7th. FLOOR AREA

= TOTAL FLOOR - LIFT AREA
= 437.61 - 6.84
= 430.77 SQ. MT.

AREA DETAIL

UPP. GROUND FLOOR

TYPES OF UNITS	Flat Area	NO.OF UNITS	AREA IN (SQ.MT.)
Type - 1(EWS)	25.33	10 No.	253.30 Sq. MT.
Type - 2(EWS)	25.57	02 No.	51.14 Sq. MT.
TOTAL AREA (Flat)		12 No.	304.44 Sq. MT.
CIRRCULATION AREA		=	96.35 Sq.MT.
TOTAL UPP.GROUND FL. AREA		=	400.79 SQ.MT.
LIFT - 1 = (1.850 X 1.850) x 2		=	6.84 SQ.MT.
TOTAL LIFT AREA		=	6.84 SQ.MT.

AREA DETAIL

FIRST FLOOR

TYPES OF UNITS	Flat Area	NO.OF UNITS	AREA IN (SQ.MT.)
Type - 1(EWS)	25.33	10 No.	253.30 Sq. MT.
Type - 2(EWS)	25.57	02 No.	51.14 Sq. MT.
Type - A(LIG)	40.63	01 No.	40.63 Sq. MT.
TOTAL AREA (Flat)		13 No.	345.07 Sq. MT.
CIRRCULATION AREA		=	96.35 Sq.MT.
TOTAL TOTAL FLOOR AREA		=	441.42 SQ.MT.
LIFT - 1 = (1.850 X 1.850) x 2		=	6.84 SQ.MT
TOTAL LIFT AREA		=	6.84 SQ.MT.

Ist to 2nd FLOOR AREA

= TOTAL FLOOR - LIFT AREA
= 441.42 - 6.84
= 434.58 SQ. MT.

AREA DETAIL

3rd FLOOR

TYPES OF UNITS	Flat Area	NO.OF UNITS	AREA IN (SQ.MT.)
Type - 1(EWS)	25.33	02 No.	50.66 Sq. MT.
Type - 2(EWS)	25.57	02 No.	51.14 Sq. MT.
Type - A(LIG)	40.63	01 No.	40.63 Sq. MT.
Type - B(LIG)	50.16	01 No.	50.16 Sq. MT.
Type - C(LIG)	37.29	04 No.	149.16 Sq. MT.
TOTAL AREA (Flat)		10 No.	341.75 Sq. MT.
CIRRCULATION AREA		=	96.35 Sq.MT.
TOTAL TOTAL FLOOR AREA		=	438.10 SQ.MT.
LIFT - 1 = (1.850 X 1.850) x 2		=	6.84 SQ.MT.
TOTAL LIFT AREA		=	6.84 SQ.MT.

3rd FLOOR AREA

= TOTAL FLOOR - LIFT AREA
= 438.10 - 6.84
= 431.26 SQ. MT.

PROJECT :
ADDITION/ ALTERATION IN SUBMISSION DRAWING FOR GROUP HOUSING " FORTUNE RESIDENCY" AT KHASRA NO -1123 81116 AT VILLAGE NOORNAGAR GHAZIABAD (UP)

OWNER :
M/s VASU INFRASTRCTURE (P.) LTD

DRAWING TITEL :
(BLOCK - I) (PROPOSED)
4th to 7th & TERRACE FLOOR PLAN & AREA CALCULATION

For VASU Infrastructure (P) Ltd.
Director

RAJ KUMAR SHARMA
Architect
Regd. No. CA/2012/58182

OWNER SIGN. | ARCHITECT SIGN

SERVICES PRIVATE LTD.
Aashirwad Architectural Services Pvt. Ltd.
Architects,Engineers,Interior Designers,Vastu Consultant
Office: 5/1,FLAT NO.5,ROOP NAGAR,DELHI-110007
Phone: 987 380765 , 9810776101
Email:- aashirwadarchitects@yahoo.com

SCALE	SHEET NO.	DEALT BY	CHECKED BY	DATE
N.T.S	50+41	POOJA		