



NOTES : (Plumbing)

- COLD WATER SUPPLY PIPE MATERIAL**
 - a) FOR INSIDE TOILET - CPVC (SDR-11) WITH SOLVENT CEMENT JOINTS
 - b) FOR DUCT / TERRACE - UPVC SCH 80 PIPES WITH SCH 80 FITTINGS BY SOLVENT CEMENT JOINT
- HOT WATER SUPPLY PIPE MATERIAL**
 - a) FOR INSIDE TOILET - CPVC (SDR-11) WITH SOLVENT CEMENT JOINTS
 - b) FOR DUCT / TERRACE - UPVC SCH 80 PIPES WITH SCH 80 FITTINGS BY SOLVENT CEMENT JOINT
- THE WATER SUPPLY PIPE DIAMETER MENTIONED ON THE DRAWING IS NOMINAL BORE / D.
- SOIL / WASTE / VENT / RAIN WATER PIPE MATERIAL**
 - a) UPTO 45 MM DIA PIPE - UPVC (4 KG/SQ.M) AS PER IS - 4985 (SUITABLE FOR SOLVENT CEMENT JOINT)
 - b) 75 / 90 / 110 / 160 MM DIA PIPE - UPVC (TYPE B) AS PER IS - 1392 & IS - 1475 (SUITABLE FOR RUBBER RING JOINT)

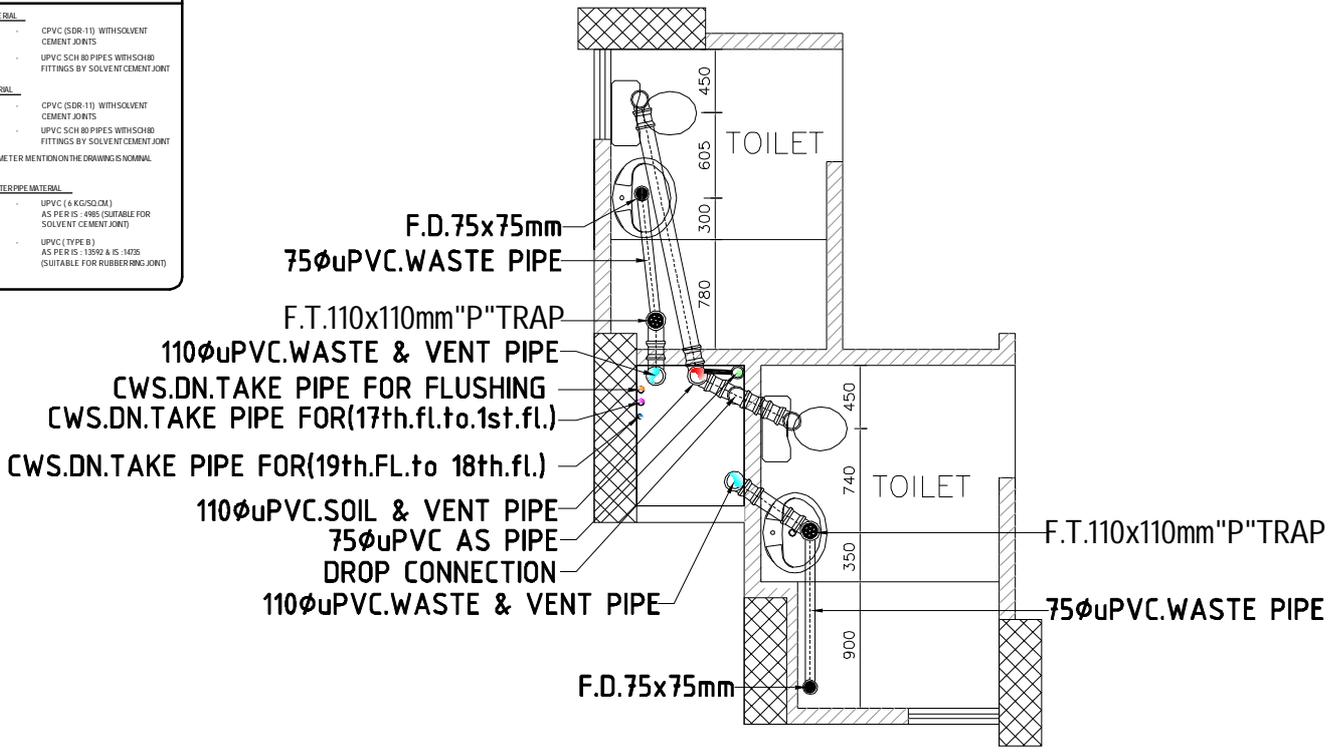

TYPICAL TOILET DETAILS DRAINAGE LAYOUT

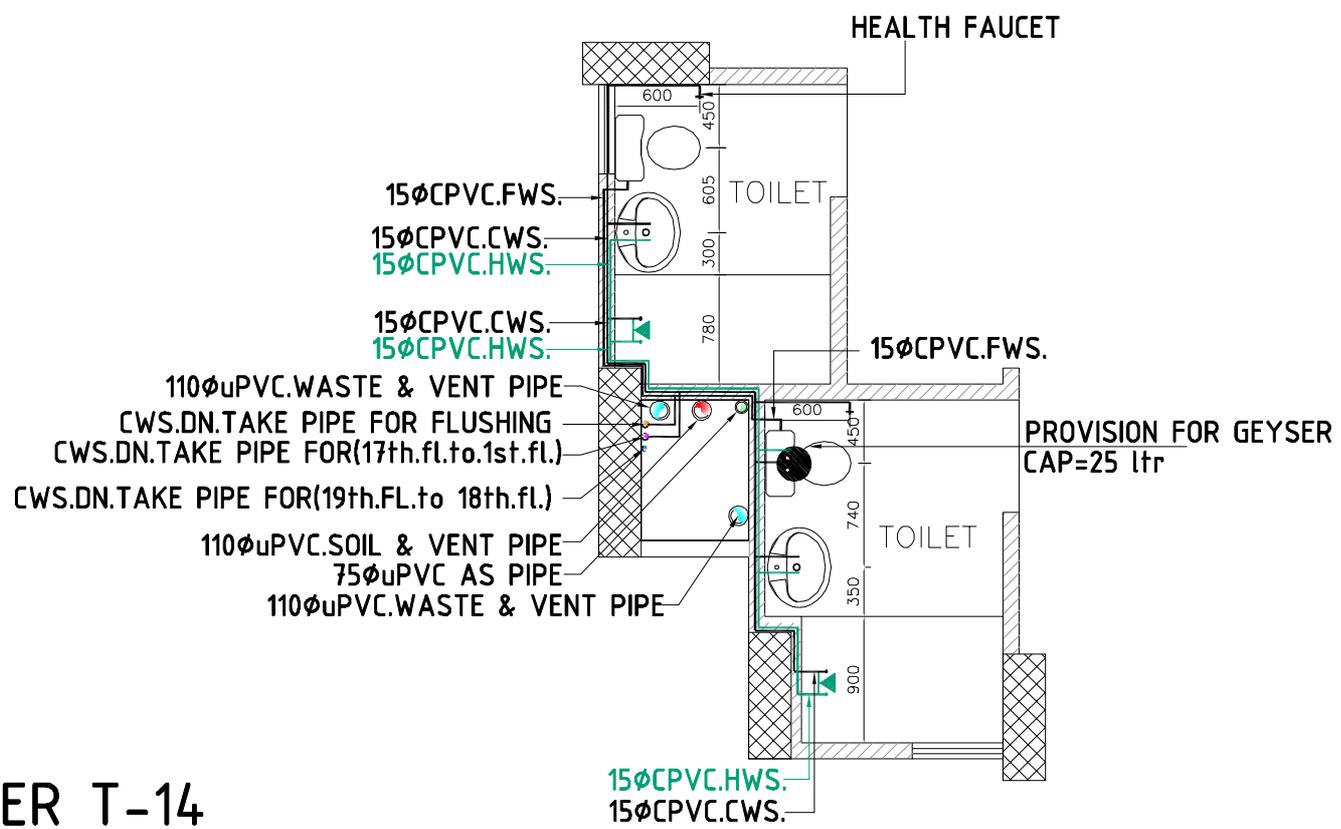

TOWER T-14