कार्य का नाम → गंगानगर एक्सटेंशन योजना के पाकेट 'V' तथा 'W' में वाल विंडफीकरण का कार्य एवं उक्त पाकेट के लिए 11 के.वी. फीडर निर्माण कार्य

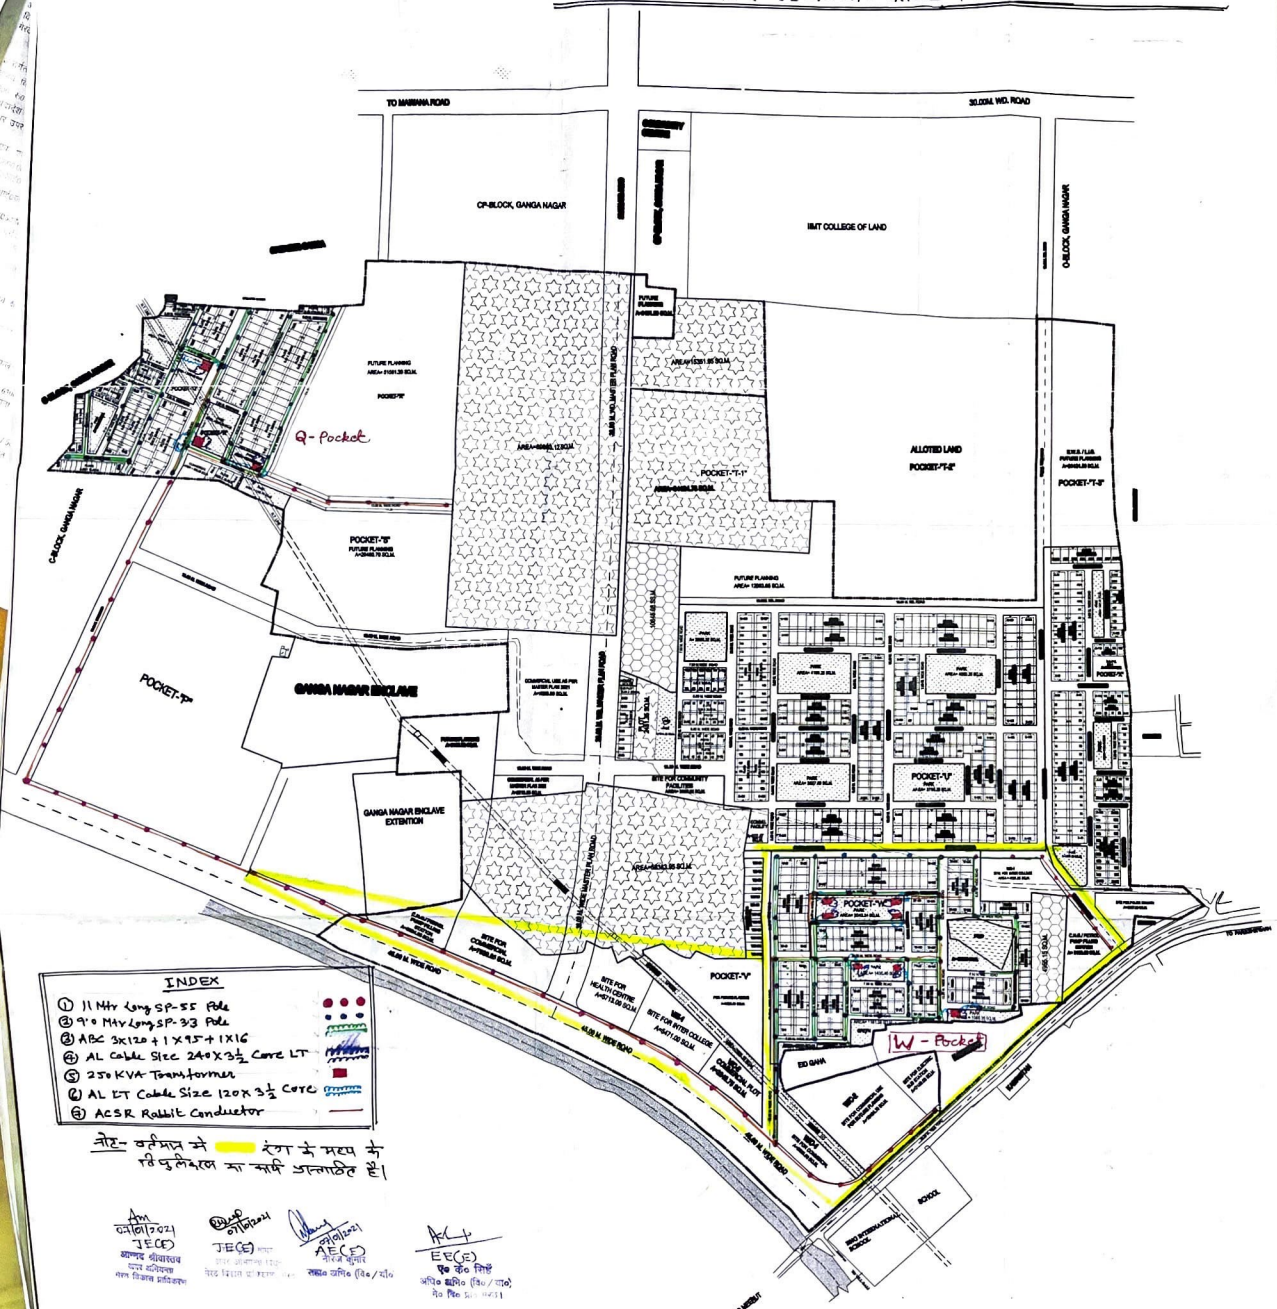

INDEX

1. 11 Mtr Long SP-55 Pole
2. 9.0 Mtr Long SP-33 Pole
3. ABC 3x120 + 1x95 + 1x16
4. AL Cable Size 240x3½ Core LT
5. 250 KVA Transformer
6. AL LT Cable Size 120x3½ Core
7. ACSR Rabbit Conductor

नोट- उक्त मानचित्र में रंग के मध्य के पीले पुलियाल का कार्य प्रस्तावित है।

JE(C) आनन्द श्रीवास्तव मुख्य अभियन्ता नगर विकास प्राधिकरण

JE(C) नगर अभियन्ता नगर विकास प्राधिकरण मेरठ

AEE(C) नीरज कुमार सहा० अभि० (वि०/मौ०)

EE(C) एन० के० सिंह अधि० अभि० (वि०/मौ०) मे० वि० प्रा० मेरठ

mda

REVISED LAYOUT PLAN OF GANGA NAGAR EXTENTION SCHEME MAWANA ROAD, MEERUT.

AREA STATEMENT

TOTAL SITEAREA	=	786445.00 SQ.M.	
AREA UNDER UN ACQUIRED & DISPUTED LAND	=	218018.96 SQ.M.	
AREA UNDER 45.00 M. & 36.00 M. WD. MASTER PLAN ROAD	=	43969.33 SQ.M.	
AREA UNDER ROAD WIDENING	=	2988.30 SQ.M.	
AREA UNDER MASTER PLAN COMMERCIAL USE	=	25634.26 SQ.M.	
AREA UNDER FUTURE PLANNING	=	130072.00 SQ.M.	
AREA UNDER COMMERCIAL USE FOR FUTURE PLANNING	=	10424.70 SQ.M.	
AREA UNDER ELECTRIC SUB STATION	=	3100.00 SQ.M.	
AREA UNDER POLICE STATION	=	3627.50 SQ.M.	
AREA UNDER C.N.G. / PETROL PUMP FILLING STATION	=	7014.85 SQ.M.	
AREA UNDER HEALTH CENTRE	=	5713.00 SQ.M.	
NET AREA UNDER PLANNING	=	332862.10 SQ.M.	100.00 %
AREA UNDER RESIDENTIAL PLOTS	=	142480.80 SQ.M.	42.80 %
AREA UNDER COMMERCIAL PLOT	=	6777.90 SQ.M.	02.04 %
AREA UNDER EDUCATIONAL PLOTS	=	10781.53 SQ.M.	03.24 %
AREA UNDER COMMUNITY FACILITES	=	2952.08 SQ.M.	00.89 %
AREA UNDER PARKS & GREEN / POND	=	51016.83 SQ.M.	15.32 %
AREA UNDER GARBAGE COLLECTION CENTRE	=	340.95 SQ.M.	00.10 %
AREA UNDER INTERNAL ROADS	=	115522.20 SQ.M.	34.70 %

AREA DETAIL OF PLOTS

POCKET-"Q"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
Q-1 TO Q-10	16.00 X 20.00 M.	320.00 SQ.M.	10	
Q-11 TO Q-27	8.00 X 15.00 M.	120.00 SQ.M.	17	
Q-28 TO Q-37	8.00 X 15.00 M.	80.00 SQ.M.	10	
Q-38 TO Q-47	6.00 X 12.00 M.	72.00 SQ.M.	10	
Q-48 TO Q-114	6.00 X 10.00 M.	60.00 SQ.M.	33	
		TOTAL	114	

POCKET-"R"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
R-1 TO R-20	16.00 X 20.00 M.	320.00 SQ.M.	20	
R-21 TO R-41	8.00 X 15.00 M.	120.00 SQ.M.	21	
R-42 TO R-66	6.00 X 10.00 M.	60.00 SQ.M.	25	
		TOTAL	66	

POCKET-"S"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
S-1 TO S-54	16.00 X 10.00 M.	160.00 SQ.M.	54	
		TOTAL	54	

POCKET-"U"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
U-01 TO U-05	8.00 X 20.00 M.	160.00 SQ.M.	05	GARBAGE PLOTS IN 04 NO. 200 [illegible]
U-06 TO U-22	8.00 X 15.00 M.	120.00 SQ.M.	17	[illegible]
U-23 TO U-29	8.00 X 15.00 M.	120.00 SQ.M.	07	[illegible]
U-30	10.00 X 20.00 M.	200.00 SQ.M.	01	ALL PLOTS PROPERTY ON [illegible]
U-31 TO U-42	8.00 X 15.00 M.	120.00 SQ.M.	12	
U-43 TO U-54	10.00 X 20.00 M.	200.00 SQ.M.	12	[illegible]
U-55 TO U-60	8.00 X 15.00 M.	120.00 SQ.M.	06	[illegible]
U-61 TO U-93	10.00 X 20.00 M.	200.00 SQ.M.	33	EXTRA NOS.U-1 REF, FREE, NOT & NEW
U-94 TO U-98	8.00 X 15.00 M.	120.00 SQ.M.	05	
U-99	10.00 X 24.00 M.	240.00 SQ.M.	01	
U-100 TO U-109	8.00 X 15.00 M.	120.00 SQ.M.	10	
U-110	11.00 X 24.00 M.	264.00 SQ.M.	01	
U-111 TO U-122	10.00 X 20.00 M.	200.00 SQ.M.	12	
U-123 TO U-127	10.00 X 25.00 M.	250.00 SQ.M.	05	
		TOTAL	101	

POCKET-"X"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
X-01 TO X-70	10.00 X 20.00 M.	200.00 SQ.M.	70	MISSING NO.-X-4,5-13,X-15 TO X-23, X-52, X-65 TO X-68, N = (12)
				EXTRA NO.-X-39 U-30,U-30,U-30/1, X-39/1 TO X-39B, X-49/1 TO X-49D = (14)
X-70 TO X-82	8.00 X 15.00 M.	120.00 SQ.M.	13	MISSING NO.-X-94, X-98 TO X-99, X-105 TO X-116 = (16) EXTRA NO.-X-92/1
		TOTAL	103	

POCKET-"W"

PLOT NO.	PLOT SIZE	PLOT AREA	NOS. OF PLOTS	REMARK
W-01 TO W-07	8.00 X 15.00 M.	120.00 SQ.M.	07	
W-08 TO W-09	8.00 X 15.00 M.	120.00 SQ.M.	02	
W-10 TO W-26	8.00 X 15.00 M.	120.00 SQ.M.	03	
W-27 TO W-216	8.00 X 15.00 M.	120.00 SQ.M.	03	
		TOTAL	217	

LEGEND:-

UN ACQUIRED LAND

DISPUTTED LAND

REVISION :-	DATE :- 22-02-2020	
DRG. BY- sd/- BALBIR SINGH SURVEYOR	SCALE :-	
sd/- 24.06.2020 ASSTT. TOWN PLANNER	sd/- 25.06.2020 TOWN PLANNER	
sd/- 25.06.2020 CHIEF TOWN PLANNER	sd/- 25.06.2020 SECRETARY	sd/- 25.06.2020 VICE CHAIRMAN